

NVR201L Series Network Video Recorder



NVR201L Series

Key Features


- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications


	NVR201-04L	NVR201-08L
Video and Audio		
IP Video Input:	4-ch	8-ch
Two-way audio input:	1-ch,RCA	
Network		
Incoming bandwidth:	32Mbps	64Mbps
Outgoing bandwidth:	64Mbps	
Remote connection:	16	
Video/Audio Output		
HDMI/VGA output:	HDMI/VGA: 1920*1080P/60HZ,1920*1080P/50HZ,1600*1200/60HZ,1280*1024/60HZ,1280*720/60HZ,1024*768/60HZ	
Recording Resolution:	6MP@25、4MP@30、3MP@30、1080P@30、720P@30	
Audio Output:	1-ch,RCA	
Synchronous Playback:	4-ch	8-ch
Decoding		
Live view/ Playback:	6MP@25、4MP@30、3MP@30、1080P@30、720P@30	
Capability:	9 x 720P@25, 4 x 1080P@25, 2 x 4MP@25, 1 x 4MP@30, 1 x 6MP@25	
Hard Disk		
SATA:	1 SATA interface	
Capacity:	Up to 6TB for each disk	
External Interface		
Network Interface:	1 RJ-45 10M/100M adaptive Ethernet Interface	
USB Interface:	1 x USB2.0, 1 x USB3.0	
General		
Power Supply:	12 VDC,2A	
Consumption(without hard disk):	≤4W (without hard disk)	
Working Temperature:	-10°C ~ + 55°C (+14°F ~ +131°F)	
Working Humidity:	10% ~ 90%	
Dimensions:	205.0 ×205.0 × 41.8 mm (8.1" × 8.1" × 1.6")	

Weight(without HDD): ≤1.17KG

Dimensions

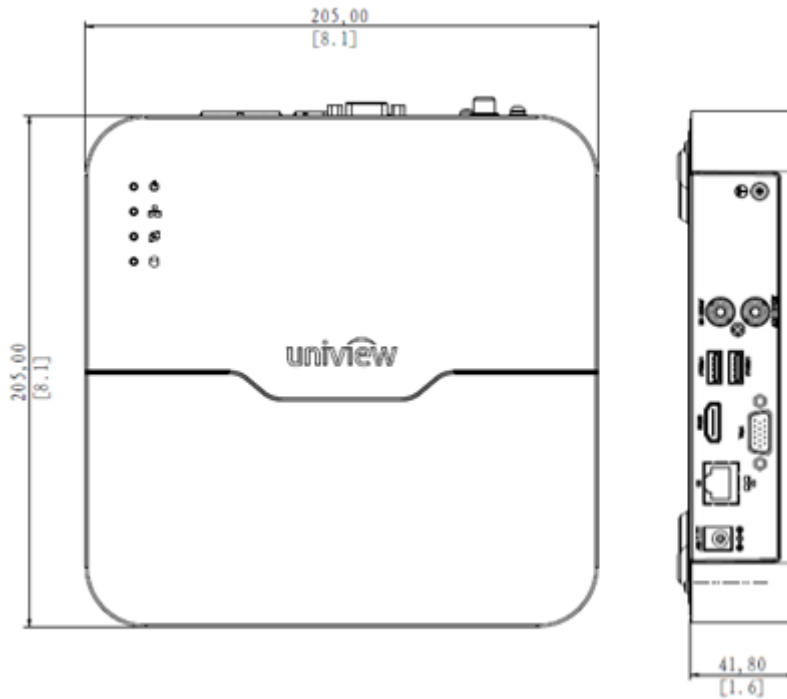

Rear Panel

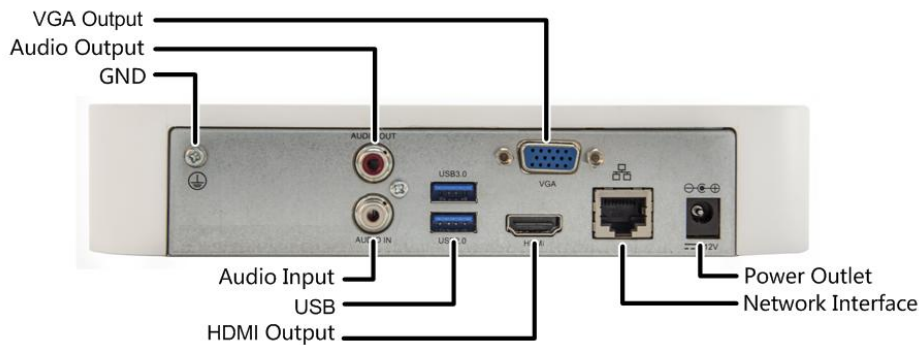

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.